

367.39331X00

#3

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): HANNINEN, et al
Serial No.:
Filed: December 8, 2000
Title: COMMUNICATION NETWORK
Group:



LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

December 8, 2000


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 9929335.9 filed December 10, 1999.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge
Registration No. 29,621

CIB/nac
Attachment
(703) 312-6600


This Page Blank (uspto)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 25th August, 2000.

This Page Blank (uspto)

Request for grant of a patent
See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.

RECEIVED BY HAND
10 DEC 1999

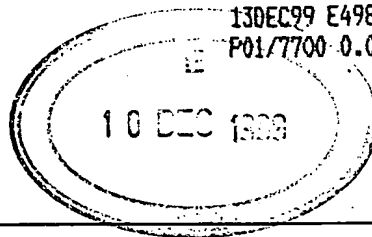

13DEC99 E498710-1 D02716

P01/7700-0.00-9929335.9

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference number **PAT 99422 GB**

2. Patent application number
(The Patent Office will use this number) **9929335.9**

10 DEC 1999

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

5911995004

4. Title of the invention **COMMUNICATION NETWORK**

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU14ONG UK

Patents ADP number (if you know it)

7577638001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature
PAUL HIGGIN

Date

10/12/99

12. Name and daytime telephone number of person to contact in the United Kingdom

CHRIS HARRISON 01252 865037

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

COMMUNICATION NETWORK

- 5 This invention relates to a communication network, in particular a communication network for dynamically allocating channels.

The popularity of cellular communication is, in part, due to its ability to allow a relatively large number of users to establish communication links over a
10 relatively limited bandwidth. However, as the popularity of cellular communication continues to increase the demands for increased capacity continue.

Time Division Multiple Access (TDMA) cellular communication systems
15 increase capacity by splitting a carrier frequency into a plurality of timeslots, thereby allowing a plurality of communication channels to be established over the same carrier frequency.

To allow speech data to be transmitted in a timeslot the speech data is
20 compressed using a codec.

To further increase capacity certain TDMA standards, for example GSM, allow the use of a half rate codec. The half rate codec cuts the amount of data needed to adequately represent human speech sounds by half when
25 compared with a full rate codec, thereby allowing two channels to share the same time slot on a carrier with minimal degradation in speech quality.

The GSM standard allows two radiotelephones operating at half speech rate to use the same resource as a single full speech rate radiotelephone by
30 alternatively transmitting the respective radiotelephone signals in the assigned

timeslot. Therefore, when system capacity is being stretched a new channel can be established at half speech rate, with only a minimum deterioration in speech quality. When system capacity requirements are low new channels can be established at full speech rate.

5

However, the use of a half speech rate channel has to be determined at channel set-up. As system capacity varies with time this may result in the capacity of the network not being optimally configured at all times.

10 It would be desirable to improve this situation.

In accordance with a first aspect of the present invention there is provided a network for communicating with a plurality of radiotelephones via respective communication channels over timeslots on a carrier, wherein the channels
15 can operate at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or two communication channels operating at the second data rate, the network comprising a controller responsive to a predetermined condition for initiating a change in the data rate of a transmitted channel from the first data rate to the
20 second data rate.

Preferably the controller is responsive to the predetermined condition to initiating a change in the data rate of two channels transmitted on separate timeslots from the first data rate to the second data rate and combining of the
25 two channels onto the same timeslot.

This provides the advantage of allowing channel allocation between full speech rate and half speech rate to be performed dynamically in accordance with system capacity requirements. This minimises the risk of channel
30 blocking due to system capacity limitations.

Preferably the predetermined condition is that the number of channels established in the network exceeds a predetermined threshold.

- 5 This allows established channels to be combined onto a single timeslot dynamically when the limits of system capacity are being reached.

Most preferably the predetermined condition is the initiation of a channel with a second network.

10

Where the first network is an internal network and the second network is an external network this provides the advantage of the first network being able to provide a better service to the external network.

- 15 Suitably the two channels originate in the network.

In accordance with a second aspect of the present invention there is provided a controller for operation in a network wherein the network communicates with a plurality of radiotelephones via respective communication channels over
20 timeslots on a carrier, the channels being operable at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or two communication channels operating at the second data rate, the controller comprising means responsive to a predetermined condition for initiating a change in the data rate of a
25 transmitted channel from the first data rate to the second data rate.

In accordance with a third aspect of the present invention there is provided a radiotelephone for operation with a network which initiates a change in data
30 rate of a transmitted channel from a first data rate to a second data rate, the

radiotelephone comprising a controller responsive to a signal from the network for changing the data rate of data being transmitted on a channel from the radiotelephone.

- 5 In accordance with a third aspect of the present invention there is provided a method of communicating with a plurality of radiotelephones via respective communication channels over timeslots on a carrier, wherein the channels can operate at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or
- 10 two communication channels operating at the second data rate, the method comprising changing the data rate of a transmitted channel from the first data rate to the second data rate in response to a predetermined condition.

- For a better understanding of the present invention and to understand how
- 15 the same may be brought into effect reference will now be made, by way of example only, to the accompanying drawings, in which:-

- Figure 1 illustrates a communication network according to an embodiment of the present invention.

20

Figure 1 shows a communication system 1 comprising a wireless intranet office (WIO) network 2 coupled to a GSM operator network 18.

- The WIO network 2 is based around an office's local area network 3 (LAN),
- 25 which is used as a platform for carrying, via IP traffic, wireless data communication received from a radiotelephone 4, thereby allowing IP telephony. Typically the IP telephony over the LAN 3 will be in accordance with the ITU H.323 standard.

The mobile GSM operator network 18 is based on a conventional cellular GSM network.

5 The WIO network 2 comprises a base transceiver station 5 (BTS), a local area network 3 (LAN), an intranet mobile cluster 6 (IMC), a gatekeeper 7, a public branch exchange (PBX) gateway 8, an A-interface gateway 9 (AGW) and an intranet location register 10 (ILR).

10 The BTS 5 is for communicating with a plurality of radiotelephones 4 (of which only one is shown) over respective communication channels in the WIO environment. The air interface between the radiotelephones 4 and the BTS 5 corresponds to a TDMA mobile communication standard, for example GSM. Accordingly, the respective communication channels are established over time slots transmitted on a carrier. In accordance with the GSM standard each
15 carrier frequency is subdivided into eight timeslots, where the set of eight time slots is referred to as a TDMA frame. The BTS 5 can have between one and sixteen transceivers, each of which represents a separate RF channel. In this embodiment, however, a single transceiver (not shown) is used.

20 The BTS 5 is connected to the LAN 3, for example an ethernet network, via the IMC 6. The BTS 5 is connected to the IMC 6 via a pulse code modulation (PCM) 30 link. The PCM 30 link is a 2.048 Mb fixed line standard. Typically a plurality of BTS 5 are connected to the IMC 6, however, for the purposes of this embodiment a single BTS 5 is connected.

25

The IMC 6 handles the radio resources and channel configurations of the BTS 5 and converts IP traffic received from the LAN 3 to pulse code modulated GSM traffic for transmission by the BTS 5 and vice versa.

Coupled to the LAN 3 is the gatekeeper 7. The gatekeeper 7 provides the WIO network call control functions, for example call forwarding and automatic re-routing. The gatekeeper 7, acting as a network controller, is responsible, when a call is being established, for instructing the IMC 6 to allocate the
5 respective communication channel between the BTS 5 and radiotelephone 4 to an available timeslot on the carrier frequency of the BTS's 5 transceiver.

The gatekeeper 7 monitor calls established over the WIO network 2 and can initiate, in response to a predetermined condition, a change in data rate of a
10 call within the WIO. Additionally, the gatekeeper 7 can combine two half speech rate channels on the same carrier in different timeslots onto the same timeslot.

The change in data rate is initiated by sending a control signal from the
15 gatekeeper 7 to the respective radiotelephones 4 instructing the radiotelephones 4 to operate at either full speech rate or half speech rate. The moving of two half speech rate channels to a single timeslot is initiated by instructing the IMC 6 to control the hand-over.

20 Two examples of the predetermined conditions are, one, establishing a call with a second network and, two, the number of available timeslots falls below a predetermined threshold.

Optionally a PBX gateway 8 is connected to the LAN 3. The PBX gateway 8
25 interfaces the LAN 3, for purposes of IP telephony, to a PBX system (not shown).

Also connected to the LAN 3 is the AGW 9. The AGW 9 acts as an interface between the WIO 2 and the GSM operator network 18. The AGW 9 converts
30 GSM pulse code modulation traffic received from the GSM operator network

18 into IP traffic and vice versa. The AGW 9 can be connected directly to the LAN 3, however typically the AGW 9 is located remote to the LAN 3 at the GSM network operators office, connected to the WIO 2 via an IP network 11.

- 5 Connected to the LAN 3 is the ILR 10. The ILR 10 provides a database of mobile subscriber information for users of the WIO 2. All subscribers having a right to make a call over the WIO 2 will have a permanent entry in the ILR 10 database. The ILR 10 is connected to the HLR 12 of the GSM operator network 18.

10

The GSM operator network 18 comprises a basestation transceiver station 13 (BTS), a basestation controller 14 (BSC), a transcoder rate adapter unit 15 (TRAU), a mobile switching centre 16 (MSC) and a home location register 12 (HLR).

15

- The BTS 13 is for communicating with a plurality of radiotelephones 17 (of which only one is shown) over respective communication channels in the GSM operator environment. The air interface between the radiotelephones 17 and the BTS 13 corresponds to the GSM standard. In accordance with the
20 GSM standard each carrier frequency is subdivided into eight different timeslots. The BTS 13 has between one and sixteen transceivers (not shown), each of which represents a separate RF channel.

- The BTS 13 is connected to the BSC 14 via a PCM 30 link, this link between
25 the BTS 13 and BSC 14 is typically known as an Abis interface. The Abis interface uses 64 kbps signalling subchannels in order to carry signalling data and submultiplexed 16 kbps channels for the transfer of user data, typically speech. The BSC monitors and controls the BTS's 13. Typically a plurality of BTS 13 are connected to the BSC 14.

30

The BSC 14 is connected to the MSC 16 over a PCM 30 link via a transcoder rate adapter unit (TRAU) 15. Alternatively, however, the TRAU 15 can be connected between the BTS 13 and BSC 14. The TRAU 15 transforms the speech data, typically transmitted at 13 kbps, in and out of the 64 kbps channels, as is well known to a person skilled in the art.

The MSC 16 acts as an exchange for switching calls between radiotelephones registered on the mobile GSM operator network 18. The MSC 16 also acts as an interface between the GSM operator network 18 and the public switch telephone network (PSTN) (not shown) for routing calls between the GSM operator network 18 and the PSTN.

Connected to the MSC 16 is the HLR 12. The HLR 12 stores the identity and user data of all the subscribers registered with the GSM operator network 18. The HLR 12 is connected to the ILR 10 of the WIO 2.

The following example describes how a call is established between two WIO subscribers A and B (not shown) (i.e. owners of radiotelephones A and B that are registered for use in the WIO network) where both radiotelephones A and B are within the transmitter range of the BTS 5 transceiver. In this example subscriber A initiates the call.

Subscriber A dials and transmits to the BTS 5 the telephone number of subscriber B. The BTS 5 converts the call request from a RF signal into PCM format for transmission to the IMC 6, via the PCM 30 link.

The IMC 6 converts the PCM signal into IP traffic and passes the call request, via the LAN 3, to the gatekeeper 7.

The gatekeeper 7 determines, by checking with the ILR 10, whether subscriber B is registered with the WIO 2 and also if the subscriber B is currently inside the WIO 2.

- 5 If subscriber B is in the WIO network 2, the gatekeeper 7 instructs the BTS 5, via the IMC 6, to start transmit a paging signal informing subscriber B that a call is waiting. If the WIO 2 includes a plurality of BTS 5 the gatekeeper 7 would instruct all BTS 5 to transmit a corresponding paging signal.
- 10 In response to subscriber B answering the paging request the gatekeeper 7 informs the IMC 6 to establish a connection between subscriber A and subscriber B over respective timeslots. Therefore, one communication channel will be established in one timeslot between subscriber A and the BTS 5 and a second communication channel will be established in a second
- 15 timeslot between subscriber B and the BTS 5.

- The above embodiment of the WIO network 2 has only eight available timeslots (i.e. the network has a single BTS 5 with a single transceiver). Of the eight available timeslots one timeslot is used for the broadcast control channel
- 20 (BCCH), a second timeslot is used for the communication channel between subscriber A and the BTS 5 and a third timeslot is used for the communication channel between subscriber B and the BTS 5. If two further calls are established between users within the WIO network 2 (i.e. four channels are established over four of the five available timeslots) this will only leave one
 - 25 timeslot available. To ensure sufficient resources are available for further connections the gatekeeper 7 instructs two of the subscribers currently utilising a timeslot at full speech rate to change to half speech rate and for the IMC 6 to combine the two half speech rate channels onto the same timeslot. This allows one of the timeslots to be released. Subsequently, if some of the
 - 30 connections are dropped the gatekeeper 7 can instruct the subscribers

transmitting at half speech rate to transmit at full speech rate and for the IMC 6 to ensure the respective subscribers are placed on separate timeslots.

As would be appreciated by a person skilled in the art the WIO network 2 may
5 comprise additional BTS 5, each BTS 5 having up to 16 transceivers.

The following example describes how a call is established between two WIO
subscribers C and D (not shown) where subscriber C is within the WIO
network 2 while subscriber D, who is also a subscriber to the mobile GSM
10 operator network 3, is outside the WIO network 2 but within the mobile GSM
operator network 3.

Subscriber C dials and transmits to the BTS 5 the telephone number of
subscriber D. The BTS 5 converts the call request from a RF signal into PCM
15 format for transmission to the IMC 6, via the PCM 30 link.

The IMC 6 converts the PCM signal into IP traffic and passes the call request,
via the LAN 3, to the gatekeeper 7.

20 The gatekeeper 7 determines, by checking with the ILR 10, as to whether
subscriber D is registered with the WIO network 2 and also if the subscriber D
is currently inside the WIO network 2. If subscriber D is not inside the WIO
network 2, the gatekeeper 7 recognises from the telephone number of
radiotelephone D that subscriber D is also a subscriber of the GSM operator
25 network 18 and routes a paging message for subscriber D to the AGW 9 for
paging of subscriber D on the GSM operator network 18.

The AGW 9 passes the paging message to the MSC 16, via the TRAU 15.
The MSC 16 determines, by checking the HLR 12, whether subscriber D is

registered with the GSM operator network 18 and if subscriber D is currently inside the GSM operator network 18.

5 If subscriber D is in the GSM operator network 18 the MSC 16 instructs the BTS 13 , via the BSC 14 and TRAU 15, to start transmitting a paging signal informing subscriber D that a call is waiting.

10 In response to subscriber D answering the paging request the MSC 16 informs the gatekeeper 7, via the AGW 9 and TRAU 15. The gatekeeper 7 instructs the IMC 6 to establish a channel over a timeslot between the BTS 5 and subscriber C to allow a call to be established with subscriber D with an associated channel being established on a timeslot between subscriber D and the BTS 13. The gatekeeper 7 establishes a logical channel over the LAN 3 between the IMC 6 and AGW 9 for the call between subscriber C and D.

15

In this example, of the eight available timeslots transmitted by the BTS 5 one timeslot is used for the BCCH and a second timeslot is used for the communication channel between the BTS 5 and subscriber C, which is used for establishing a connection with subscriber D in the GSM operator network 18. If two further calls are placed between the WIO network 2 and the GSM operator network 18 and two calls are established between subscribers within the WIO network 2 this would result in all eight timeslots being allocated. One timeslot for the BCCH, three timeslots for calls placed between the WIO network 2 and GSM network 18 and four timeslots for the two internal WIO network 2 calls. In response to all eight timeslots being allocated the gatekeeper can dynamically allocate channels to increase resources, as described above. Alternatively the gatekeeper 7 can dynamically allocating channels on initiation of a call from the GSM operator network 18. In response to a call request received by the gatekeeper 7 from a user on the GSM operator network 3 wanting to establish a call with a subscriber of the WIO

20

25

30

network 2 the gatekeeper 7 instructs two WIO subscribers, each utilising a timeslot at full speech rate, to change to half speech rate and for the IMC 6 to combine the two half speech rate channels onto the same timeslot. This results in one of the timeslots being released, thereby allowing a call to be placed between the WIO subscriber and GSM operator network user.

The compressing of the two users speech data in the WIO network 2 from full speech rate to half rate can provide better voice quality than the compression of two users in the GSM operator network 18. If the speech data between two users on the GSM network 18 passes through the TRAU 15, from the first user to the MSC 16 and again from the MSC 16 to the second user, this can result in a deterioration of speech quality when operating at half rate speech. The WIO network 2 does not require a TRAU, thereby allowing an improved speech quality compared to the GSM network 18 when operating at half rate speech through a TRAU.

The present invention may include any novel feature or combination of features disclosed herein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to the present claimed invention or mitigates any or all of the problems addressed. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention, for example TDMA mobile communication standards other than GSM may be used.

CLAIMS

1. A network for communicating with a plurality of radiotelephones via
5 respective communication channels over timeslots on a carrier,
 wherein the channels can operate at a first or second data rate such
 that a timeslot on the carrier can transmit a single communication
 channel operating at the first data rate or two communication channels
 operating at the second data rate, the network comprising a controller
10 responsive to a predetermined condition for initiating a change in the
 data rate of a transmitted channel from the first data rate to the second
 data rate.
2. A network according to claim 1 wherein the controller is responsive to
15 the predetermined condition for initiating a change in the data rate of
 two channels transmitted on separate timeslots from the first data rate
 to the second data rate and combining the two channels onto the same
 timeslot.
- 20 3. A network according to claim 1 or 2, wherein the first data rate is a full
 speech rate and the second data rate is a half speech rate.
4. A network according to any preceding claim, wherein the
25 predetermined condition is that the number of channels established in
 the network exceeds a predetermined threshold.
5. A network according to any preceding claim, wherein the
30 predetermined condition is the initiation of a channel with a second
 network.

6. A network according to any preceding claim, wherein the two channels originate in the network.
-

5 7. A network substantially as hereinbefore described with reference to the accompanying drawings, and/or as shown therein.

10 8. A controller for operation in a network wherein the network communicates with a plurality of radiotelephones via respective communication channels over timeslots on a carrier, the channels being operable at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or two communication channels operating at the second data rate, the controller comprising means responsive to a predetermined condition for initiating a change in the data rate of a
15 transmitted channel from the first data rate to the second data rate.

20 9. A radiotelephone for operation with a network which initiates a change in data rate of a channel from a first data rate to a second data rate, the radiotelephone comprising a controller responsive to a signal from the network for changing the data rate of data being transmitted on a channel from the radiotelephone.

25 10. A method of communicating with a plurality of radiotelephones via respective communication channels over timeslots on a carrier, wherein the channels can operate at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or two communication channels operating at the second data rate, the method comprising changing the data rate of a transmitted channel from the first data rate to the second
30 data rate in response to a predetermined condition.

11. A method according to claim 9, further comprising in response to the predetermined condition initiating a change in the data rate of two channels transmitted on separate timeslots from the first data rate to the second data rate and combining the two channels onto the same timeslot.
12. A method substantially as hereinbefore described with reference to the accompanying drawings, and/or as shown therein.

ABSTRACT

COMMUNICATION NETWORK

- 5 A network for communicating with a plurality of radiotelephones via respective communication channels over timeslots on a carrier, wherein the channels can operate at a first or second data rate such that a timeslot on the carrier can transmit a single communication channel operating at the first data rate or two communication channels operating at the second data rate, the network
- 10 comprising a controller responsive to a predetermined condition for initiating a change in the data rate of two channels transmitted on separate timeslots from the first data rate to the second data rate.

15

(Figure 1)

NOT TO BE REPRODUCED

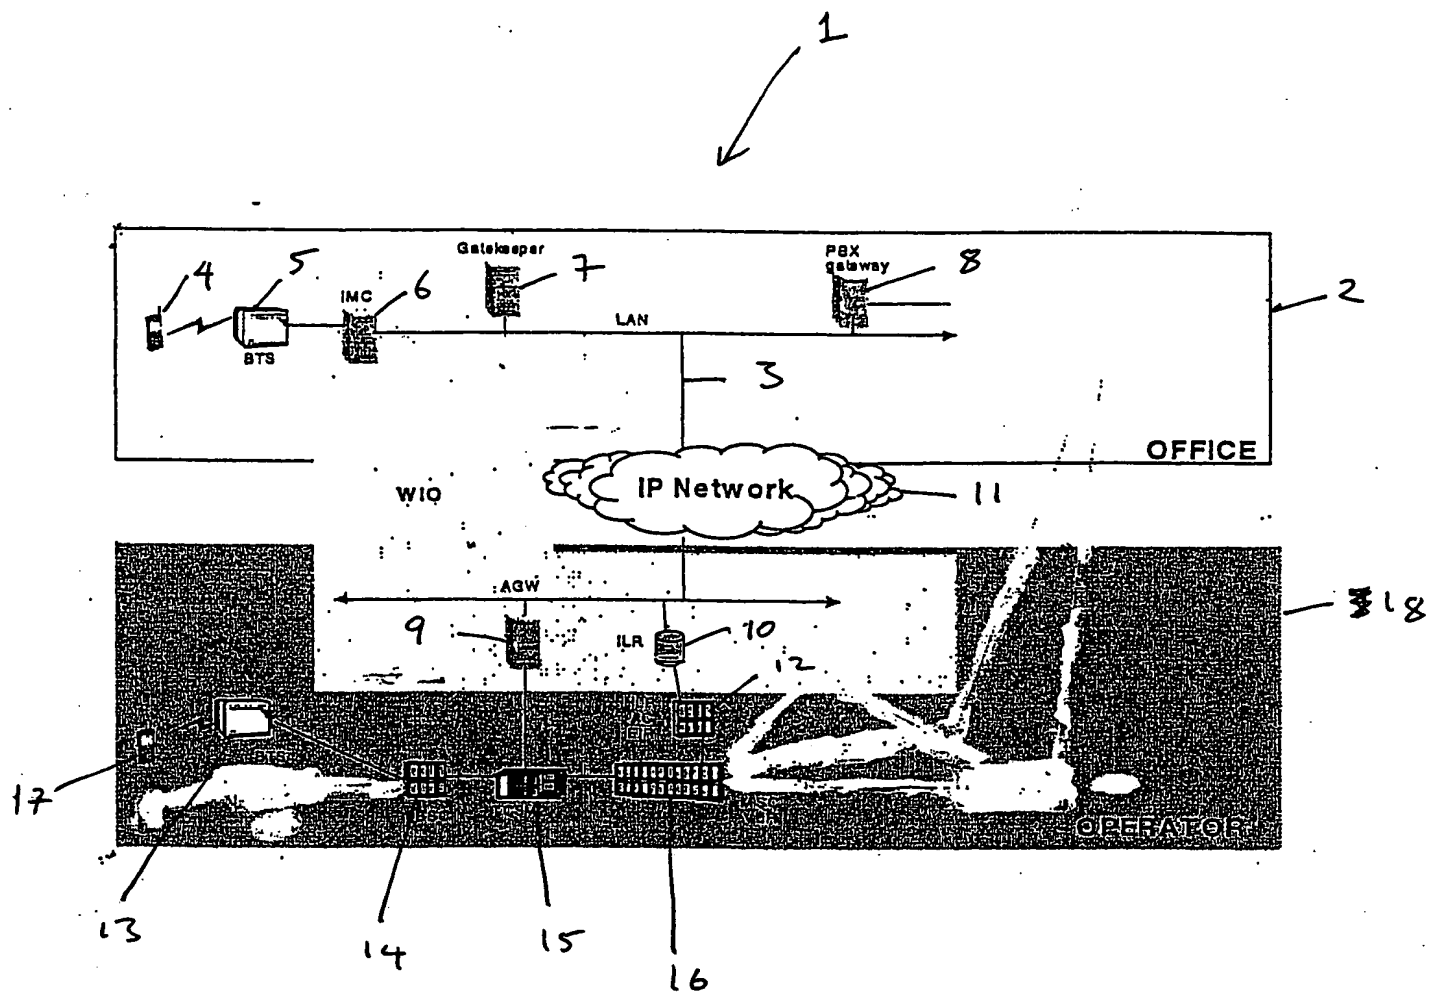


Figure 1

This Page Blank (uspic,